

VEZOS


Operation / Tech Manual 09.107515

Product: Handysand Auto II XL

Part Number: 23.5011101

Product: Handysand Auto II Basic

Part Number: 23.5011200

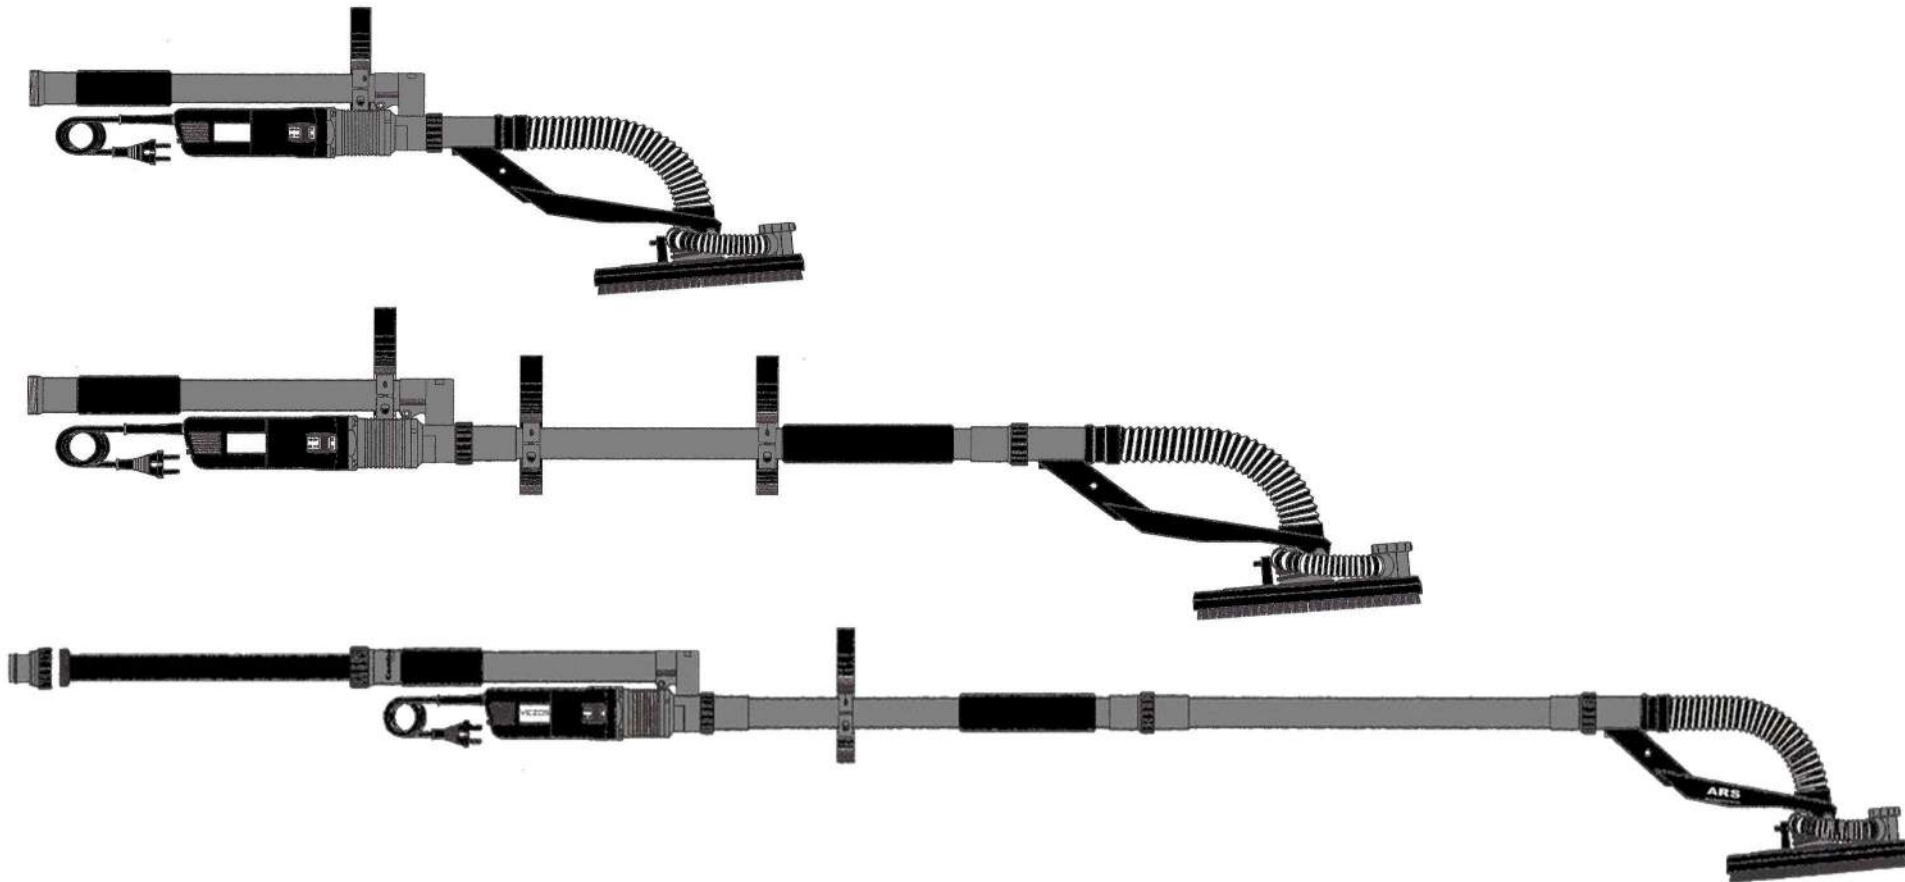

Combo
line

www.vezos.gr



Retractable Extension

Push - Pull & secure, when in need of that extra length while sanding narrow and high working areas.

Soft Grip


Anti slide soft grips are placed in two main parts of the sander

Grip On Handle

Attach the handle, to any part of the main sander, for that secure & better grip.

Four Place Lock

Lock your connector in 4 different positions in order to sand at with extra ease

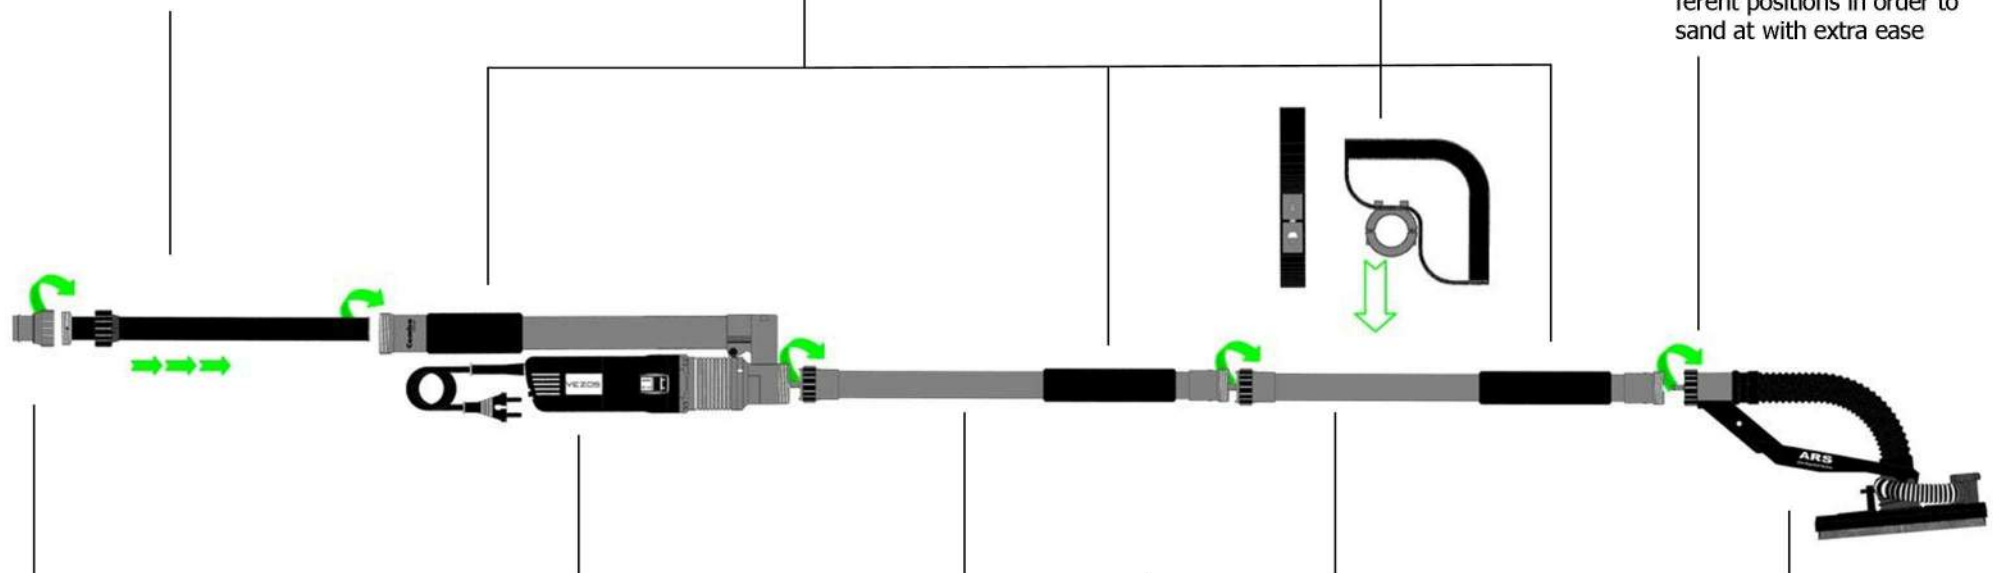

Vacuum Connectors

Two different sizes of connectors are available, 32mm & 38mm (recommended). Simply connect your vacuum hose to this end, for clean working and ARS function

Motor End

Powerful 750 Watt motor & extra long power cord.

Main Extension

Basic Edition includes one 65cm extension, XL Edition includes two (65*2=130cm) extensions. Note: Try your sander with three extensions!

HD Head Attachment

You will find the HD system on the XL Edition, Always including the VEZOS ARS (Automatic Regulated Suction) system, for that strong gripping effect



Fast set up—30 Seconds for the Handysand Auto 2 XL Edition


Your Handysand II, can be broken down in to pieces, either for easy transportation or for safe keeping. The Combo line connectors, allow you to assembly your sander as you wish. Enabling you to change the size of your Handysand II, starting from 97cm and reaching up to 2.72cm. Achieving an amazing 4 meters working height!

Easily place the male to female connector and secure by simply tightening the nut.




The Handysand Auto II main extensions, provide you that extra height when needed. Each 65 cm extension, secures with a custom made nut, no need for extra tools in order to attach the extension. Try your Handysand II, with one, two or even three extension, allowing you working height up to 4 meters high. Tip: Always make sure you hear the click before securing the nut.

Vacuum Connectors & Pressure Releaser

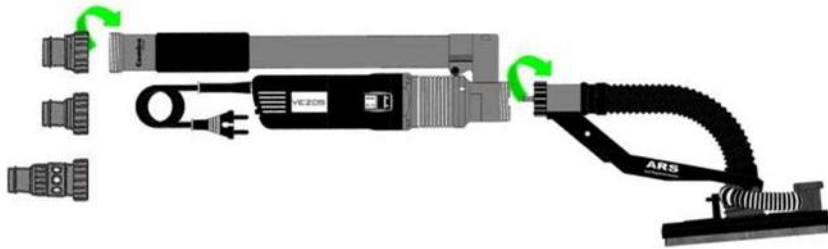


Choose between two different sizes of vacuum connectors 32 & 38 mm (recommended), or your manual pressure releaser.

Retractable Extension

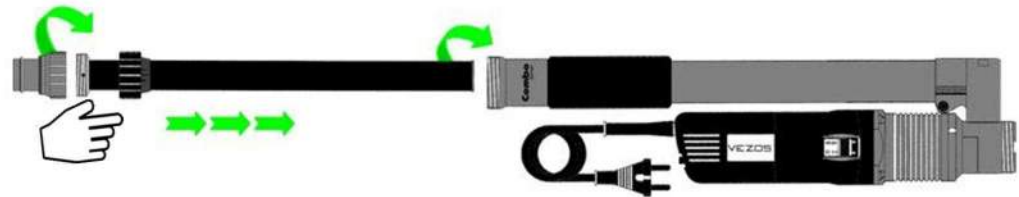

The Retractable Extension may be purchased as an accessory with the basic Edition. Included in the standard XL edition.


Motor 750 Watt

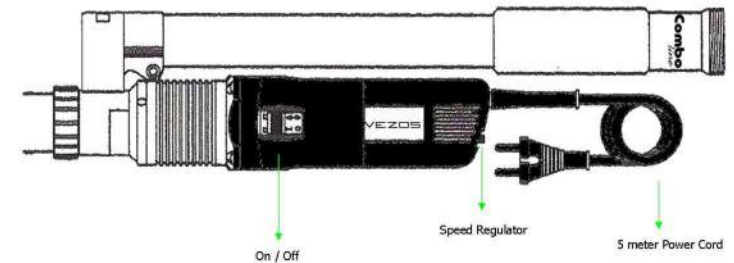

Electric Safety

- The power line jack and the power outlet should be compatible. Do not modify the jack.
- Avoid contact with grounded surfaces, such as pipes, heating boxes, etc.
- Do not transfer nor hang the device using the power line; do not pull on the power line to remove the jack from the power outlet. Keep the power line away from high temperature, oil, sharp edges and moving parts.
- When working outdoors, always use an extension line that has been approved for outdoor use. The plug connections must be splash-proof.
- In order to minimize the risk of an electric accident, keep the power line and all electric components dry & in good condition.

Where to attach your Grip On Handle

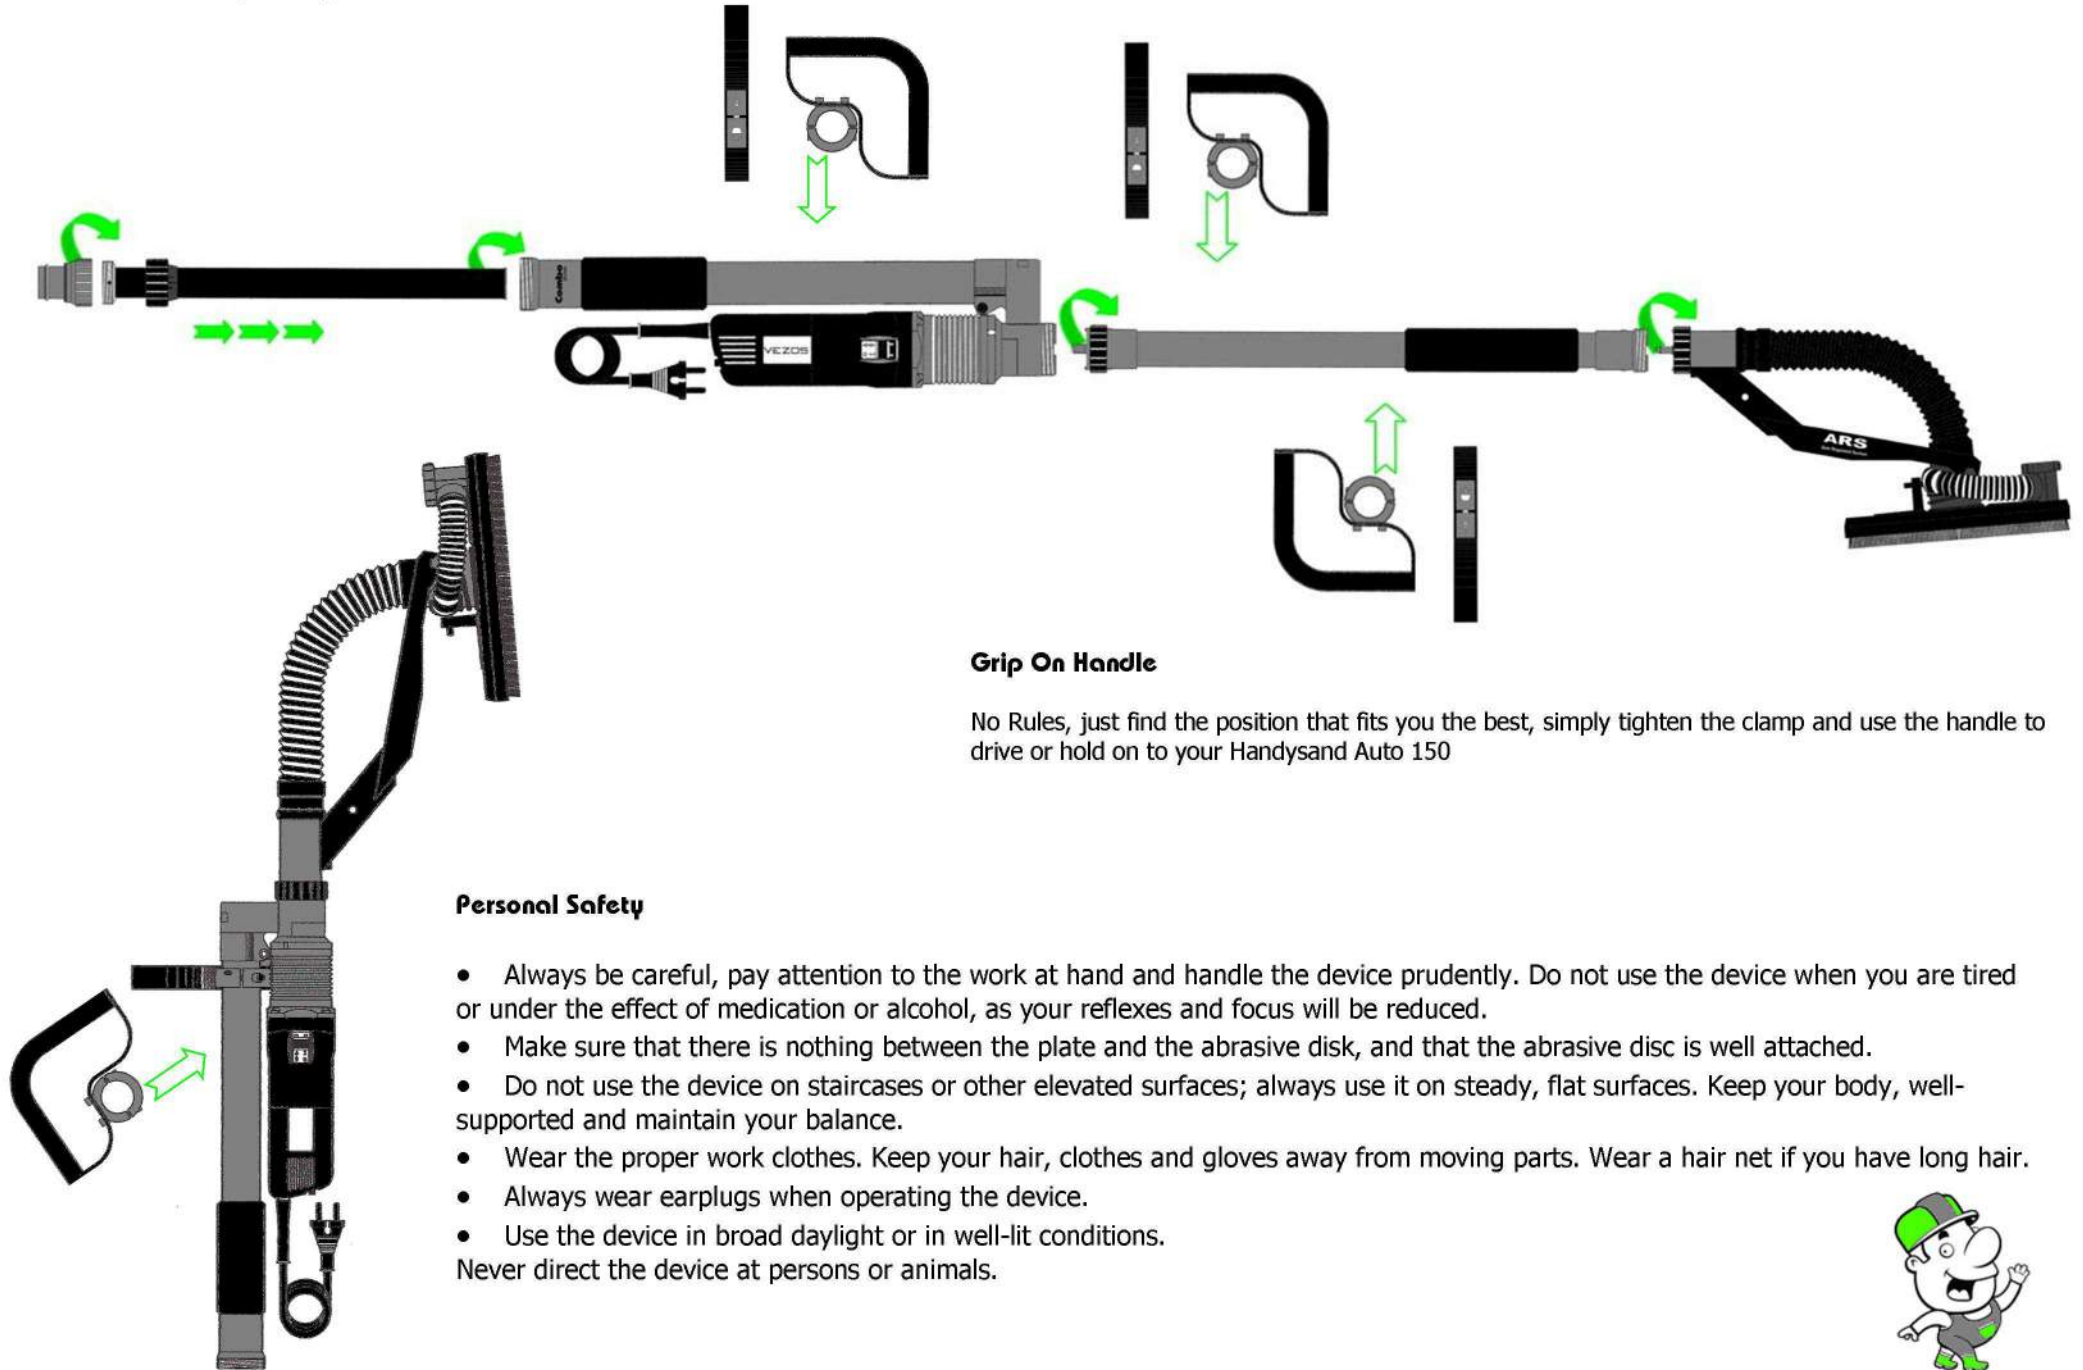

Grip On Handle

No Rules, just find the position that fits you the best, simply tighten the clamp and use the handle to drive or hold on to your Handysand Auto 150

Personal Safety

- Always be careful, pay attention to the work at hand and handle the device prudently. Do not use the device when you are tired or under the effect of medication or alcohol, as your reflexes and focus will be reduced.
 - Make sure that there is nothing between the plate and the abrasive disk, and that the abrasive disk is well attached.
 - Do not use the device on staircases or other elevated surfaces; always use it on steady, flat surfaces. Keep your body, well-supported and maintain your balance.
 - Wear the proper work clothes. Keep your hair, clothes and gloves away from moving parts. Wear a hair net if you have long hair.
 - Always wear earplugs when operating the device.
 - Use the device in broad daylight or in well-lit conditions.
- Never direct the device at persons or animals.



Use of Device

The Handysand Auto II editions may be operated on surfaces such as:

- Painted walls and ceilings
- Drywall, cement walls, ceilings and floors

The device has been manufactured and designed for use under normal conditions and not in an explosive environment.

When not in use, you should place the device in such position that it is not worn, where there is no risk of it falling or causing an accident to nearby person.

You should never use this device on surfaces that contain metal objects such as (nails, tacks, cables etc) or metal surfaces because these can be charged with electricity and this may cause danger or electrocution of the operator.

General Instructions

- Read the complete guide manual before starting off your device. Get yourself familiar with the controls and usage of the device.
- This device is not intended for use by persons (including under aged) with reduced physical, sensory or mental capabilities, lack of knowledge.
- Never allow children to use the device.
- Never use the device when there are children or pets nearby.
- The user is responsible for any accidents or hazards suffered by third parties or their property.
- Always check the device, the power cord and the extension cable before using the device. Only operate the tool when it is in good working order and is not damaged in any way. Damaged parts have to be replaced immediately by a qualified service point. Contact manufacturer company for information.

Work Area

- Keep your workplace clean and well-illuminated
- Do not use this device in an environment where there you run the risk of explosion due to flammable materials or dust

Warranty

VEZOS warrants to the Distributor that greatest efforts will be made to make sure that at the time of delivery all products to be sold to the Distributor shall be free from any defects in material or workmanship and shall conform to the specifications agreed upon at the time the Distributor places any orders for such Product. VEZOS after an examination on the problem shall credit, repair or replace, without charge to the Distributor, any such Products that are defective or nonconforming, provided that the Distributor notifies VEZOS of such defective and non-conforming Products by filling the Warranty Claim Form with all the essential information reading the warranty problem.

This warranty is conditioned upon the prepaid return of the equipment claimed to VEZOS for verification of the claimed defect. If the claimed defect is verified, VEZOS will repair or replace for free of charge, any defective parts. The equipment will be returned to the original purchaser transportation prepaid. If inspection of the equipment does not disclose any defect in material or workmanship, repairs will be made at a reasonable charge, which charges may include the cost of parts, labour and transportation for testing and evaluation.


The credit if the Product, repair or replacement of the Product will be executed only after an examination from VEZOS that for the maintenance and repair of the Products the directions and specifications that are described within the technical manuals of the Products are supplied with the Products, have been followed.

The afore-mentioned obligations stretch no further than the warranty VEZOS can claim from his suppliers of each material products. VEZOS makes no warranty and disclaims all implied warranties of merchantability and fitness for a particular purpose in connection with accessories, equipment, materials or components sold but not manufactured by VEZOS. These items sold, but not manufactured by VEZOS (such as electrical parts etc) are subject to warranty, if any, of their own manufacture.


This warranty covers only and exclusively credits of the Product, repairs or replacement of Products and under no circumstances does it cover any other demand for income loss, workmanship damages and accidents of people or users.

4 Position head attachment lock

Adjust your Handysand Auto II head attachment to the desired position for perfect and easy sanding procedure on walls, ceilings & floors.

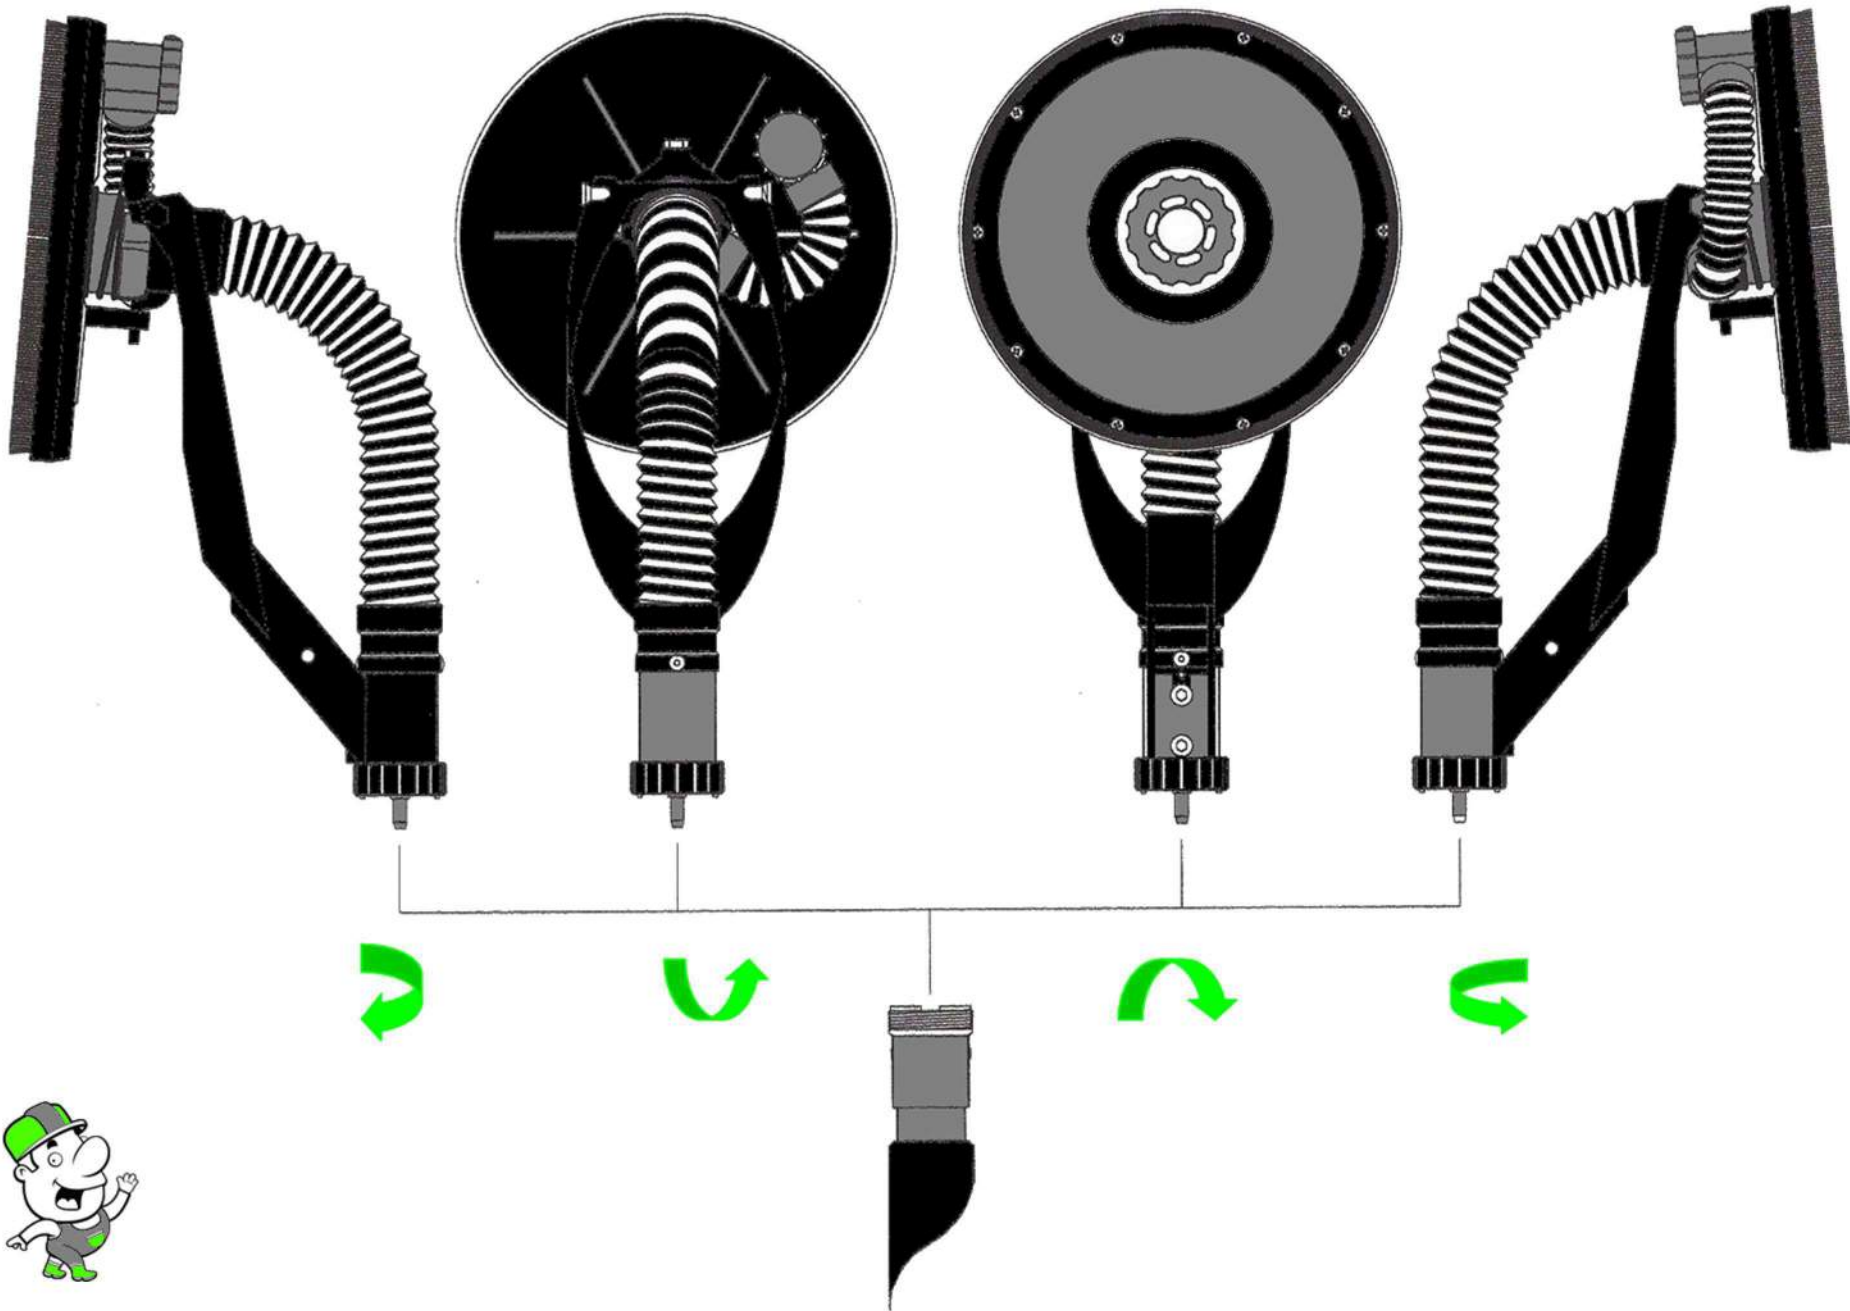

Working my Handysand Auto II

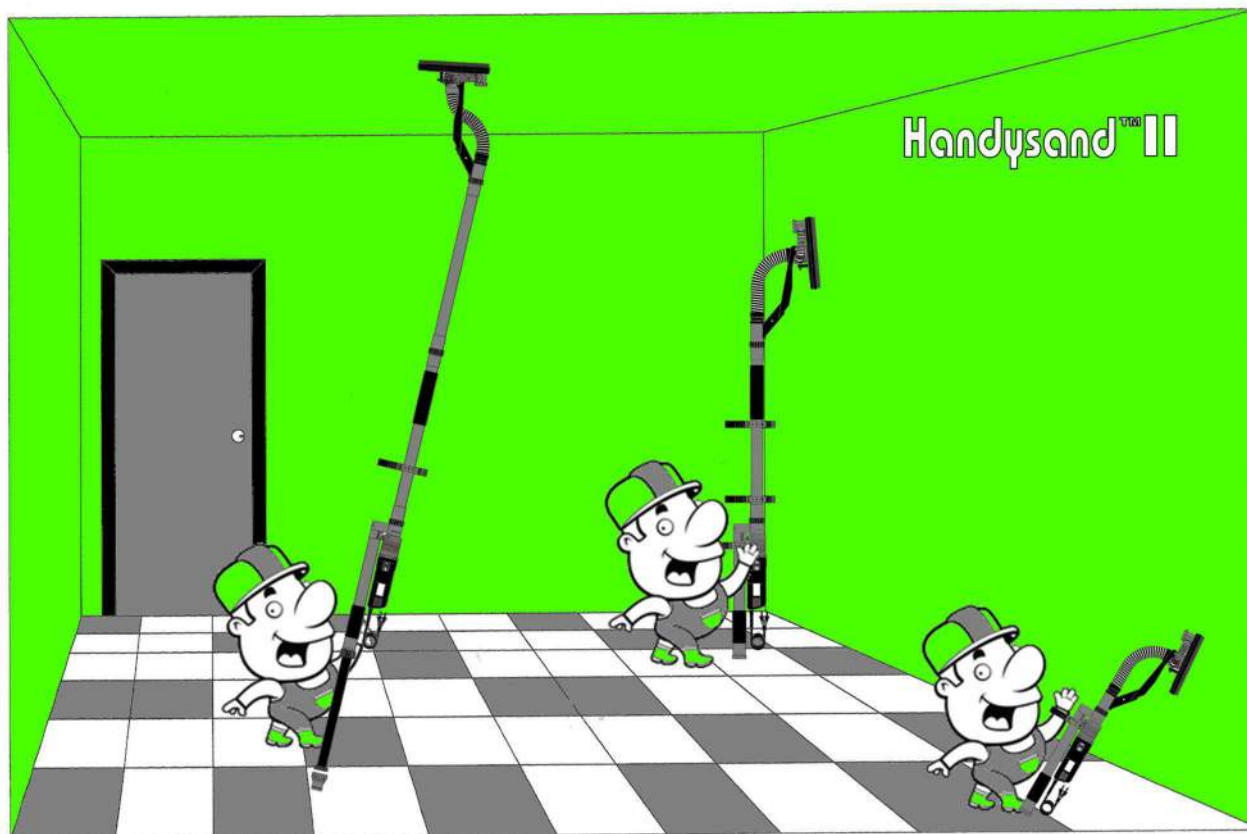

When purchasing your Handysand Auto II, make sure that you have read all the Operation and Technical instructions, before powering up your device.

Connect the Motor end to the Head Attachment for your mini version of the Handysand II. For longer versions of the sander, you may adapt 1-3 main extensions. For that extra boost in length adapt the retractable extension and use at preference.

Together with your new sander, you will find the abrasive disc, extra available purchase sizes from P40-P220, attach the disc on the head.

To achieve the ARS function, you will need to connect the Handysand Auto II, to any branded professional vacuum cleaner, to the rear end of your tool. International vacuum hose sizes are 32 & 38mm, for this reason by purchasing the XL edition, you will be provided with two sized vacuum connectors, VEZOS recommends for better gripping results to use the 38mm connector to the equivalent hose. Also the combo line accessories include a pressure release adapter, for manually releasing the suction, when necessary.

Hold on firmly to your tool, once you are comfortable and feel secure with the way you are holding the HandySand II, then power up.

Approach the necessary surface, and simply start sanding. Beware of any nails or sharp edges, if you sand over these mentioned parts, then most possibility you will tear the abrasive pad. While preparing your surface we suggest that any nails are removed initially.

When finishing the job, always clean your tool, for long life durability. Place your tool in a secure and safe area, do not leave the tool in an outdoor environment.

Troubleshooting guide

In case the device does not start up, check the following:


- The power line is connected to an active outlet
- The main switch is at the «on» position

In case the device does not work as expected, check the following:

- The abrasive disc is sufficiently attached to the abrasive pad of the device
- The abrasive pad is in good condition
- There is no dust or other material blocking the flow of the air through the device
- The entire surface of the disc is in (vertical) contact with the working surface
- Check if the devices outer casing/suction hose or shaft is damaged or torn.

If the device still does not function as expected, or if you notice strange or unusual operation of the device, contact the distributor or manufacturer.

Recommended Best set up for high ceilings

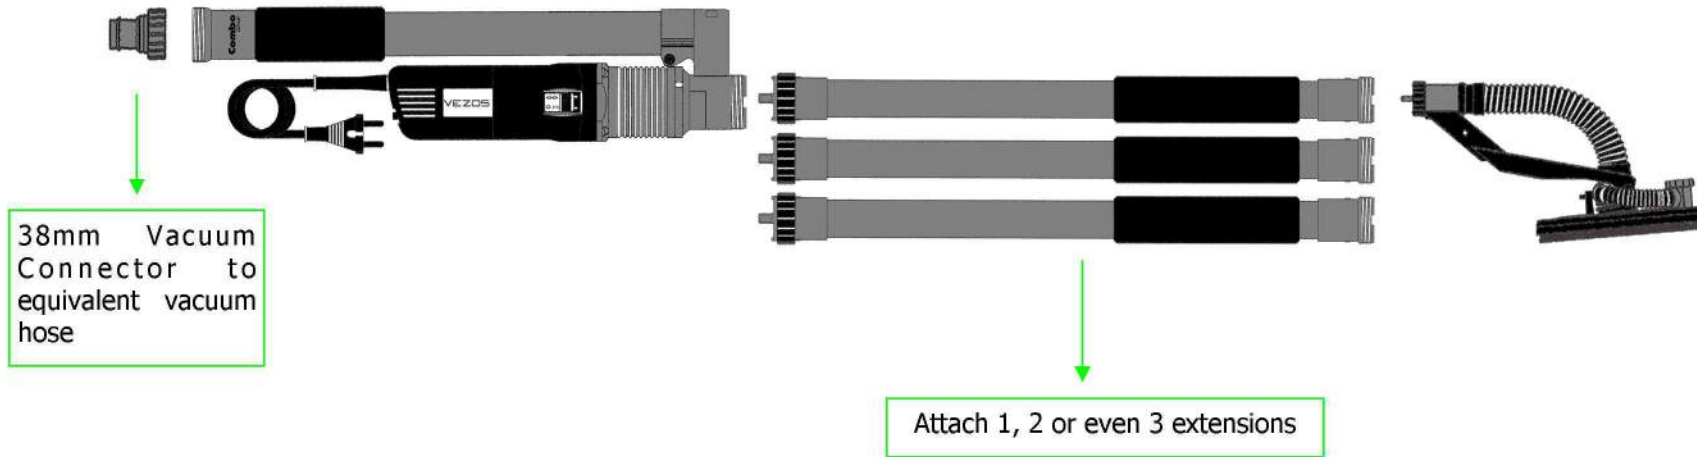

When working on high ceilings we suggest for better results not to work with your retractable extension 45cm

Important Information

Dear Customer,

On your new wall sander you will find your device serial number. Kindly note this down in the indicated box, for safe keeping and future reference for spare parts.

My Serial Number


My model

Purchase Date



Registration

You may register your wall sander to VEZOS by sending your serial number to technical@vezos.gr & stay updated will all news and upcoming products

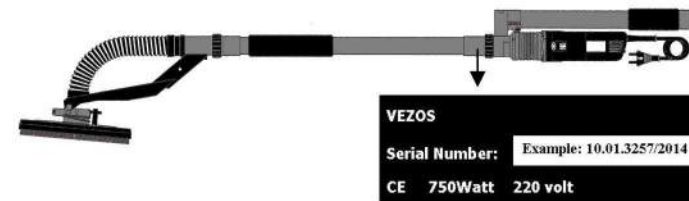

VEZOS reserves the right to change or update any accessory/spare part or unit without further notification.